



CIERRAPUERTAS DE SUELO

HCT



A section adjust 90° - 25° closing speed
B section adjust 25° - 0° closing speed


SIZE VERSION	A	B	C	D	E	F	G	Maximum Door Width (mm)	Maximum Door Weight (kg)
HSD 8600	68	278	132	290	150	62-70	50-58	1050	120
HSD 8800	68	278	132	290	150	62-70	50-58	1200	160

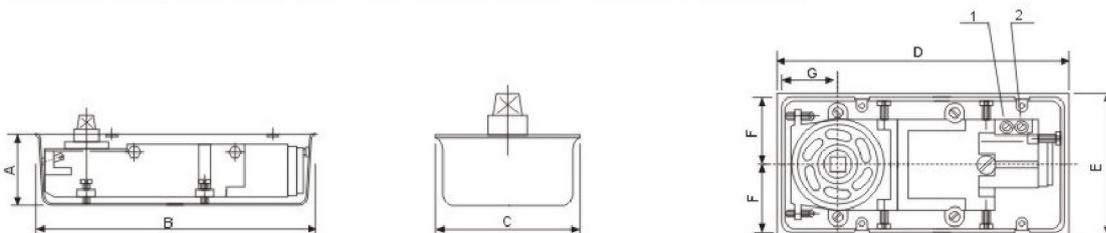

- Maximum single-action open angle is 116° , with 90° auto-orientation fitting. Unorientation can be made according to clients' demand.
- The perpendicular and the height of the door can be adjustable by 9 mm. ±4 degree adjustment is possible in zero position aligning.
- Whole hydraulic pressure in door, two section speed control of closing door. The regulating position is 90° -25° and 25° -0° .
- Constant temperature set assures steady speed of closing under big difference in temperature.
- Built-in redactor can prevent door from damage in case of extreme exterior pressure or strong wind.
- Passed 500,000 opening times' test.

Bisagra de piso

Instrucciones de instalación

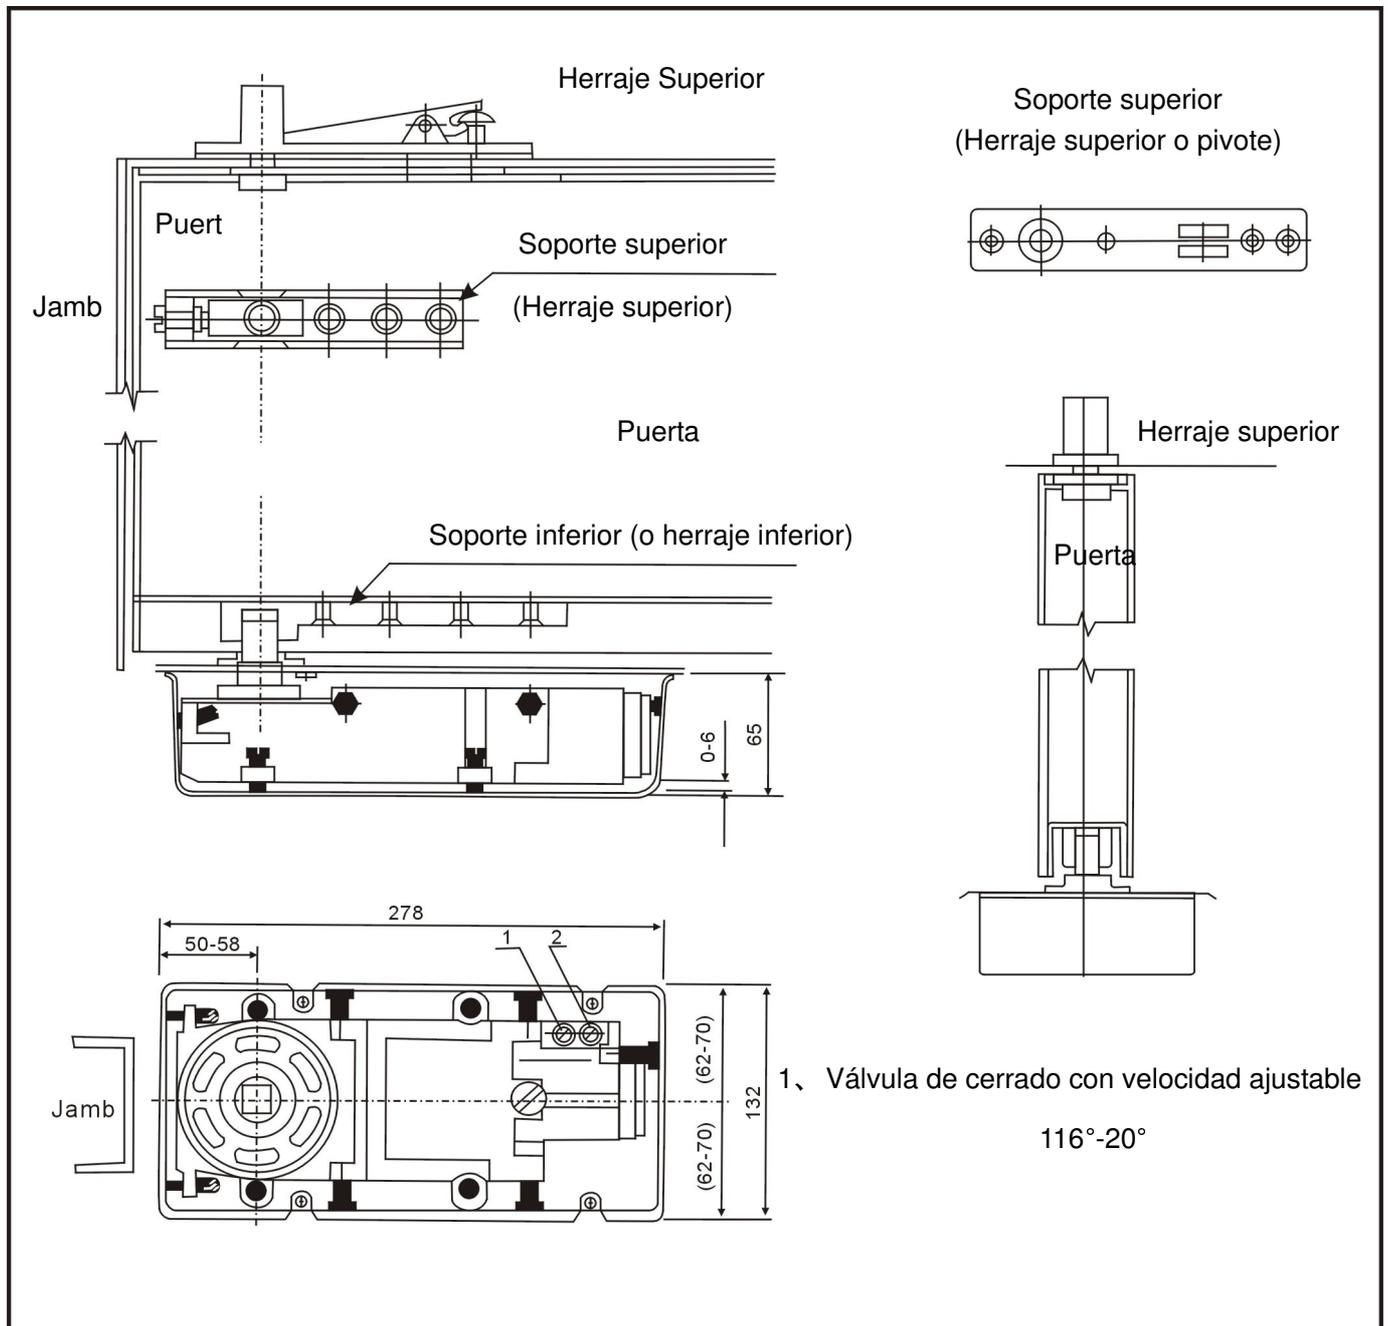

Modelo No.	Ancho máximo de Puerta (mm)	Peso máximo de Puerta (kg)	Dimensiones de bisagra de piso
8600	120	1050	290X150X68
8800	160	1200	

Aplicables para Madera, Puertas de Aluminio, y puertas de cristal (con herrajes o corredizos)